




Low Fire

PLA - Blue Clay

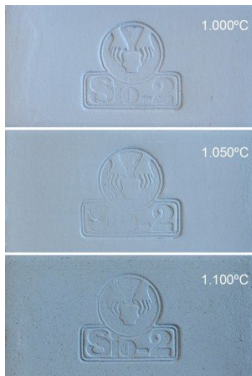

PLA

Ref.10 600 010 | UPC: 8422830106028

Blue Earthenware Clay

Blue earthenware body. Its blue colour in oxidising atmosphere is a highlight in the range of low firing colours. Its fineness and plasticity make it an excellent choice for wheel- throwing and modelling. Very good behaviour with standard pottery glazes. Available in extruded body (moist form).

Firing range: **1050-1080°C**

Water content (throwing): 19%

Plasticity (IP Atterberg): 15

Carbonate content (CaCO₃): 16%

Drying shrinkage: 5.6%

Firing shrinkage (1050°C): -0.3%

Porosity (water absorption at 1050°C): 12.1%

Dry bending strength: 4.1 N/mm²

Fired bending strength (1050°C): 31.7 N/mm²

Thermal coefficient (25-500°C): $76.6 \times 10^{-7} \text{ } ^\circ\text{C}^{-1}$

 Wrapped |  5 kg



CERÁMICA COLLET S.A. | Fundada en 1874

Polígono Industrial L'Olana, S/N. E-08292 Esparreguera - Barcelona (SPAIN)
T +34 93 777 23 44 | F +34 93 770 94 11 | info@sio-2.com | www.sio-2.com